




**CONCRETE FOOTPATH**

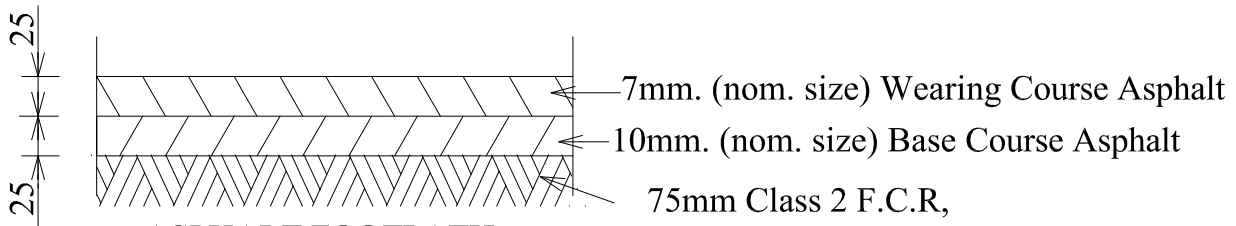

**ASPHALT FOOTPATH**

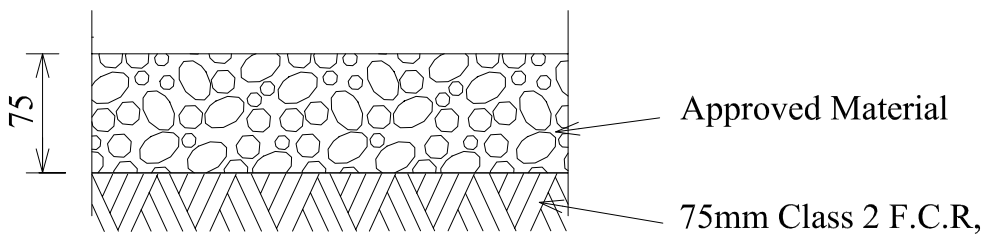

**GRANITIC FOOTPATH**

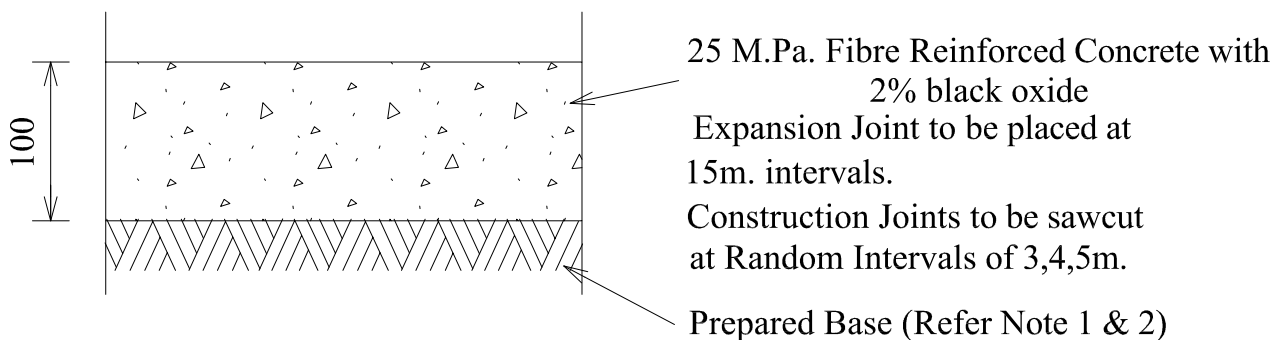

**FIBRE REINFORCED CONCRETE**

**NOTES**

1. For reinstatement of existing footpath, excavate to firm level base as approved by Council Supervisor. Over excavation is to be reinstated with approved FCR to form firm level base.
2. For new Concrete footpath construction, provide minimum of 75mm. layer of approved F.C.R.
3. For new Asphalt footpath construction provide minimum of 75mm. layer of approved F.C.R.
4. Footpath crossfall to match existing otherwise max:1.40 min:1.60 concrete strength to be 25M.Pa. at 28 days.